


LME□ L系列		内径 ID		尺寸 (mm) Dimensions(mm)						重量 Weight (g)	基本负载荷 Basic Load rating			
型号 Type	钢球列数 No. of ball rows	dr (mm)	公差 (μm)	外径 D (mm)		长度 L (mm)		B (mm)			W	D ₁	动态 C (N)	静态 Co (N)
LME 8LUU	4	8		16	0	46		33		1.1	15.2	40	421	804
LME 12LUU	4	12	+9 -1	22	0	61		45.8	0	1.3	21	80	813	1570
LME 16LUU	5	16		26	-11	68	-0.3	49.8	-0.4	1.3	24.9	115	921	1780
LME 20LUU	5	20	+11 -1	32		80		61		1.6	30.3	180	1370	2740
LME 25LUU	6	25		40	0	112		82		1.85	38	430	1570	3140
LME 30LUU	6	30	+13 -2	47		123		104.2		1.85	44.5	615	2490	5490
LME 40LUU	6	40		62	0	151	-0.4	121.2	0	2.15	59	1400	3430	8040
LME 50LUU	6	50	+16 -4	75	-15	192		155.2		2.65	72	2320	6080	15900
LME 60LUU	6	60		90	0	209		170		3.15	86.5	3900	7550	20000



型号 Type	钢球列数 No. of ball rows	主要尺寸 MAIN DIMENSIONS										基本负载荷 Basic Load rating	
		内径 ID		外径 OUTER DIAMETER		长度 LENGTH		外止动槽 OUTER LOCKING GROOVE		W	径向跳动 Radial Runout (max)	动态 DYNAMI Co (kgf)	静态 STATIC Co (kgf)
		dr	公差 TOLERANCE	D	公差 TOLERANCE	L	公差 TOLERANCE	B	公差 TOLERANCE				
SW04L	3	1/4"	0.5"	12.7	0	1.375"	1.022"	0.4687"	0.039"	0.039"	33	54	
SW06L	4	3/8"	0.625"	18.875	-0.013	1.5938"	1.2716"	0.588"	0.039"	0.039"	36	65	
SW08L	4	1/2"	0.875"	22.225	0	2.375"	1.925"	0.8209"	0.0459"	0.015	83	160	
SW10L	4	5/8"	1.125"	28.575	-0.016	3.03125"	2.2079"	1.0590"	0.0559"	0.020	126	240	
SW12L	5	3/4"	1.25"	31.75	0	3.0937"	2.3314"	1.176"	0.0559"	0.020	140	280	
SW16L	5	1"	1.5625"	39.688	-0.019	4.2831"	3.5094"	1.4687"	0.0679"	0.020	160	320	
SW20L	6	1-1/4"	2"	50.8	0	5"	4.0094"	1.8859"	0.0679"	0.025	255	560	
SW24L	6	1-1/2"	2.375"	60.325	-0.022	5.6875"	4.8236"	2.2389"	0.0859"	0.025	350	820	
SW32L	6	2"	3"	76.2	-0.025	7.75"	6.3834"	2.8379"	0.1029"	0.030	620	1622	

1N=0.102kgf

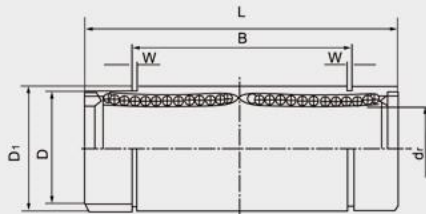

CENTRAL DE ATENDIMENTO:

11 3379-8863 / 11 3379-8836
 11 94727-5173 / 11 94727-5164
 11 94727-6241

vendas@uptechbrasil.com